مصنع رواد الصلب للحديد
Steel Pioneers Factory





Approved Vendor

Vendor Code: RCJ000968 | Vendor Code: 506283 | Vendor Code: 10404 | Vendor Code: 10057283 | Vendor Code: 2006725

Authorized Dealer

P.O. Box: 10158, Jubail Industrial City - 35729, Kingdom of Saudi Arabia
Tel.: + 966 13 3420011 - Fax: +966 13 3420022

ص.ب. ص.ب: ١٠١٥٨، مدينة الجبيل الصناعية – ٣٥٧٢٩، المملكة العربية السعودية
هاتف: ٠٠١١ ٣٤٢ ١٣ ٩٦٦+ - فاكس: ٠٠٢٢ ٣٤٢ ١٣ ٩٦٦+

info@steelpioneers.com www.steelpioneers.com

EPOXY COATED REBARS
Specifications:

Standard	: ASTM A775/A775M
Surface Preparation	: 40-100µm
Coating Thickness	: 175-300µm
Coating Continuity	: 67.5V
Size	: 8mm-40mm

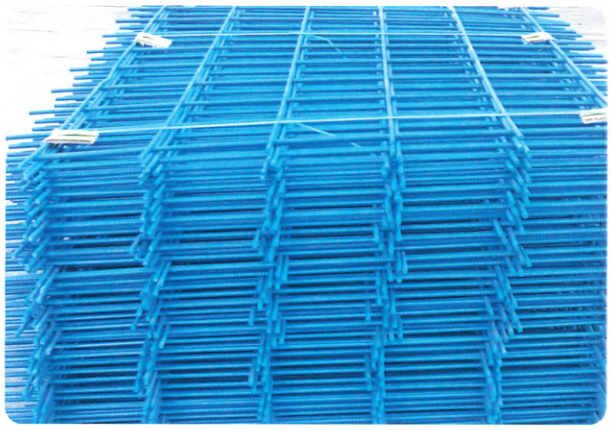

EPOXY COATED WIRE MESH
Specifications:

Standard	: ASTM A884 / A884M
Diameter	: 3.5mm to 10 mm.
Spacing	: 10, 15, 20, 25, 30 cm
Sheet Length	: up to 6 meter
Sheet Width	: up to 2.75 meter

CUT & BEND (BLACK & EPOXY COATED)

Standard	: ASTM A-934M,D3963.
Cut & Bend	: 8-32mm.
Stirrups	: 8-14mm.
Standards	: ASTM, BS, DIN, SSA-224.

REINFORCEMENT STEEL (REBAR)

Standard	: ASTM A615/A615M Gr 60.
dIA.8-40MM	

COLD ROLLED REBAR IN-COILS
Specifications:

Tensile Strength	: 585 MPa (min)
Dia.	: 6mm,8mm,10mm,12mm
Standard	: ASTM A1064/A1064M

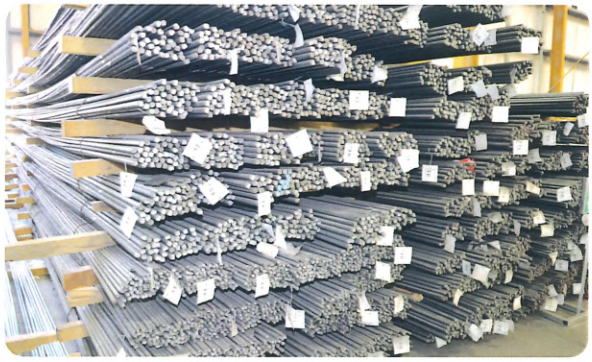

PLAIN BAR
Specifications:

Standard	: ASTM A1064/A1064M
Dia.	: 5/6/8/10/12mm

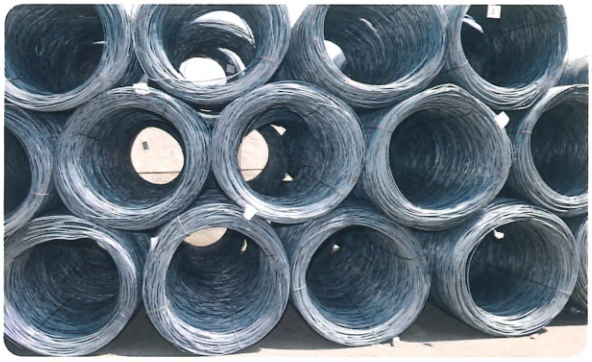

HOT ROLLED REBAR-IN-COILS
Specifications:

Standard	ASTM A615/A615M.
Dia.	8/10/12mm

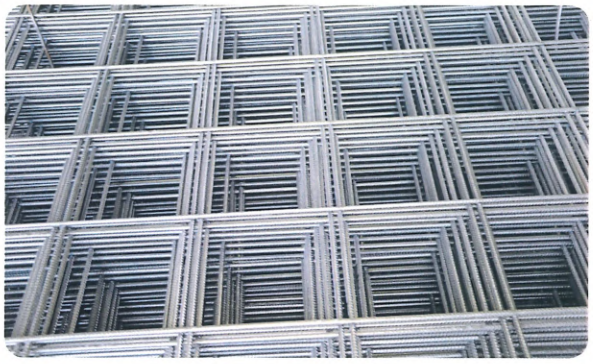

BLACK & GALVANIZED WIRE MESH
Specifications:

Diameter	: 3.5mm to 10mm.
Spacing	: 10, 15, 20, 25, 30 cm.
Sheet Length	: up to 2.75 meter
sheet Width	: up to 2.75 meter.
Standeard	: ASTM, BS, DIN

WIRE ROD
Specifications:

Standard	: SAE 1006/SAE 1008
Tensile Strength	: (360-450) N/mm^2
Diameter	: 5.5mm to 14mm

مـصنع رواد الـصلب
Steel Pioneers Factory

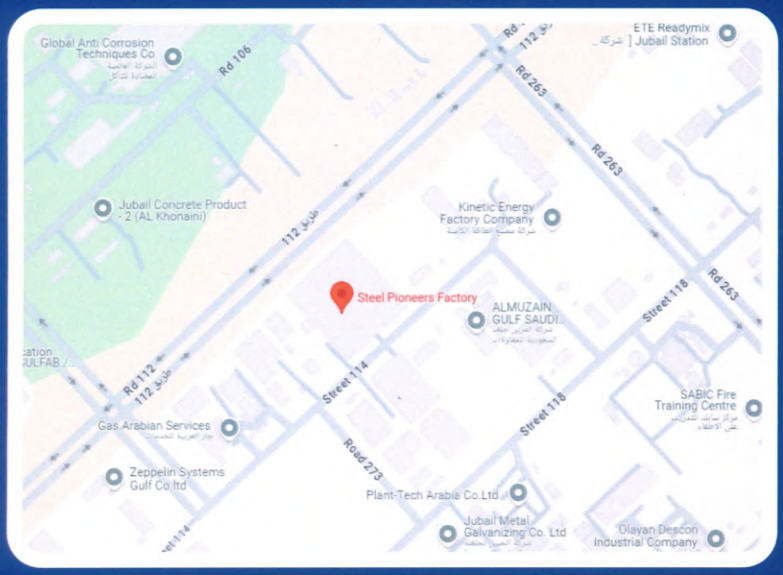

CONTACT US:
TAREEG NO: 114,
NEAR SABIC FIRE TRAINING CENTRE
SUPPORT INDUSTRIAL AREA - 3,
JUBAIL INDUSTRIAL CITY-1
SAUDI ARABIA
TEL.: +966 13 3420011
FAX: +966 13 3420022
info@steelpioneers.com
www.steelpioneers.com